

Electrolux Dishwashing

Undercounter Dishwasher WT38TDE

The Electrolux Dishwashing range is produced for customers with the highest conceivable demands for good efficiency, economy and ergonomics for dishwashing operation. The product range comprises of glasswashers, undercounter dishwashers, hood type dishwashers, rack type dishwashers, flight type dishwashers and pot and pan washers. WT38TDE "Medical-Line" dishwasher-disinfector complies with UK guidelines stated in (Health Technical Memorandum) HTM 2030: Washer Disinfectors (1997), Design Considerations Section 3.15, with a final thermal disinfection rinse 80C for 1 minute.



Model 502007

EASY TO INSTALL AND MAINTAIN

- The WT38TDE requires 6,85 kW, according to the heating elements installed inside the boiler.
- Equipped with drain pump if required to facilitate installation.
- Efficient approved non-return valve in water inlet circuit.
- Required space the same as a conventional domestic dishwasher.
- Simple service from the front.

EASY TO CLEAN

- WT38TDE has smooth surfaces and a fully pressed double wash tank with rounded corners to facilitate cleaning.
- Wash/rinse arms and nozzles in stainless steel.
- Wash/rinse arms and filter easy to remove.

- No pipes inside the washing chamber.
- Self cleaning cycle, easy to activate.
- 304 AISI stainless steel exterior, door, wash tank, tank filter and screws.

EASY TO USE

- Simple control panel, with digital window for wash and rinse temperature.
- Three dishwashing programs, one for lightly soiled tableware, one for normally soiled items and a third program for heavy soiled items.

- This model thermally disinfects thanks to the 60 sec. rinsing cycle at 80°C measured on the items in the basket.
- Built-in rinse aid and detergent dispenser for a perfect washing and rinsing result.
- Pre-arrangement for HACCP system implementation and Energy Management device.



Electrolux

**Electrolux Dishwashing
Undercounter Dishwasher WT38TDE**

- Atmospheric boiler combined with the rinse booster pump for perfect rinsing performances in terms of sanitation, energy saving (water temperature always constant during rinsing cycles), independence from the water pressure on the network.
 - Thermal lock on dishwasher door - to prevent it being opened during the wash and rinse cycles.
 - Verification check point - for on-site inspectors to carry out "on the spot" inspections via front of machine.
 - Solenoid valve resistant to 65°C.
- Complete cycles set at: 1st = 360 sec, 2nd = 540 sec, 3rd = 660 sec.

CONSTRUCTION FEATURES

- Automatic boiler emptying function.
- Fault auto-diagnosis system.
- Double skinned insulated walls.
- Counterbalanced door.
- All models finished in top quality materials to aid durability.
- Completely closed on the reverse by a cover plate.


EASY ON THE ENVIRONMENT

- Meets the requirement of CE for safety.
- 98% recyclable by weight.
- CFC free packaging.
- Low noise level <63 dBA.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Complies with WRAS water guidelines.

	WT38TDE 502007
TECHNICAL DATA	
Water supply	
temperature - °C	65
hardness - °f	7-14
Thermometer	●
Drain pump	●
Rinse Booster Pump	●
N° of cycles	3
Dishes capacity/h	180
Basket capacity/h	10
External dimensions - mm	
width	600
depth	612
height	850
Cell dimensions - mm	
width	500
depth	500
height	335
Washing cycle	
temperature - °C	55-65
tank capacity - lt.	23
power pump - kW	0.736
electrical elements - kW	2.2
Hot rinse cycle	
duration - sec.	35
temperature during rinse - °C	92
water consumption - lt./cycle	7.5
Boiler capacity - lt.	12
Boiler elements - kW	6
Power - kW	
drain pump	0.034
Rinse pump	0.26
total power	6.85
Net weight - kg.	68
INCLUDED ACCESSORIES	
BASKET FOR 12 SOUP BOWLS 240MM-GREEN	1
BASKET FOR 48 SMALL CUPS/24 CUPS-BLUE	1
KIT 4 PLASTIC BOXES FOR CUTLERY-YELLOW	1
ACCESSORIES	
NOT TRANSLATED	864015
NOT TRANSLATED	864017
NOT TRANSLATED	864026
NOT TRANSLATED	864050
NOT TRANSLATED	867019
NOT TRANSLATED	867024
NOT TRANSLATED	922166
12 L EXTERNAL MANUAL WATER SOFTENER	860412
8 L EXTERNAL AUTOMATIC WATER SOFTENER	860413
BASKET FOR 5 TRAYS 530X325MM-RED	867006
COVER GRID FOR SMALL/LIGHT ITEMS IN RACK	867016
DETERGENT LEVEL PROBE KIT FOR UC+HT DW	864004
HACCP PRINTER KIT FOR UC, HT AND POTW	864002
INTEGRATED HACCP KIT FOR UC, HT AND POTW	864001
KIT 4 CASTORS F.DOUBLE SKINNED UNDERC.DW	864008
RINSE AID LEVEL PROBE KIT FOR UC+HT DW	864005
STAND FOR UNDERCOUNTER DISHWASHER	860418

Electrolux Dishwashing
Undercounter Dishwasher WT38TDE

502007

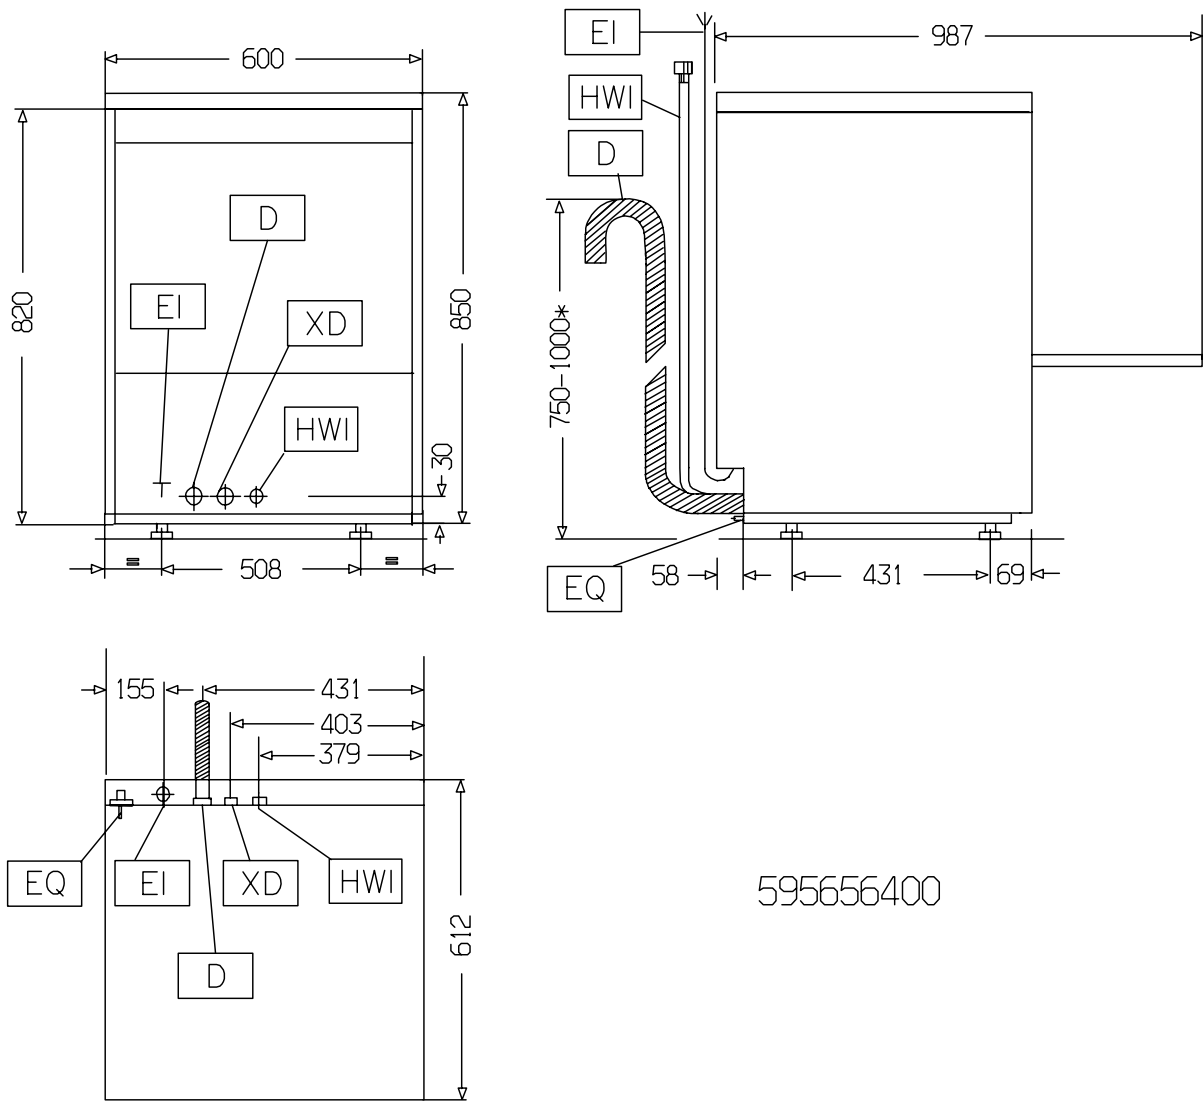

IBC025

2007-06-05

WT38TDE 502007	
LEGEND	
D - Water drain	20.5mm
EI - Electrical connection	400 V, 3N, 50
HWI - Hot water inlet	G 3/4"
XR - Connection for detergent dispenser	●